

210237US0

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**IN RE APPLICATION OF**

Odile Aubrun-SONNEVILLE, et al.

EXAMINER: A. BERMAN

SERIAL NO: 09/903,606

FILED: JULY 13, 2001

GROUP ART UNIT: 1617FOR: WATER-IN-OIL EMULSION AND
ITS USE AS A COSMETIC**DECLARATION UNDER 37 C.F.R. 1.131**ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:

I, Jean-Thierry Simonnet, hereby declare:

1. I am a named co-inventor on the above-referenced patent application.
2. Prior to May 29, 2000, and after January 1, 1996, compositions containing an aqueous phase dispersed in an oily phase, and an oligomeric or polymeric emulsifier containing i) a polyolefinic apolar component comprising at least 40 carbon atoms and ii) at least one polar component were prepared in France. The oily phase in these compositions contained hydrocarbon oils present in an amount of at least 40% by weight relative to the total weight of the oily phase.
3. As evidence of such preparation, submitted herewith at Tab A is a true and correct copy of the laboratory notebook pages of my co-inventor, Odile Auburn-Sonneville, describing the preparation of compositions containing the ingredients set forth in paragraph 2 above.

4. The numerical codes set forth on these notebook pages are internal company codes relating to specific ingredients. Compounds G21772 and G21545 are oligomeric or polymeric emulsifiers containing i) a polyolefinic apolar component comprising at least 40 carbon atoms and ii) at least one polar component. Compounds 53743 and 71378 are hydrocarbon oils. Also, in addition to the oligomeric or polymeric emulsifier, compound G21772 contains hydrocarbon oil.

5. Although the dates on which these compositions were prepared have been redacted from the submitted page, all compositions were prepared in France prior to May 29, 2000 and after January 1, 1996.

6. The undersigned petitioner declares further that all statements made herein of her own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of this application or any patent issuing thereon.

7. Further deponent sayeth not.

Simonet Jean Thibaut
Name
Simonet
Signature

Date June 1, 2004

0599-29

moisture 3000 rpm
x5 ~

A.	621772	45	125
	53763	38	164
	71378	267	1235
	71168	165	825
	633	81	85
B.	633B	215	275
	2769	25	25
	1129	23	45
	5115	88,65	662,25

environ formule à 90%, eau au moins
= hétérogène bcp de gros globules mal dispersés no poubelle

0599.30






male 300 rpm

en formule que 0599.29 au procédé pris.

une 3 grosse mais homogène

$$2(74) = 3,20 \text{ UD}$$

$$(75) = 12,3 \text{ UD}$$

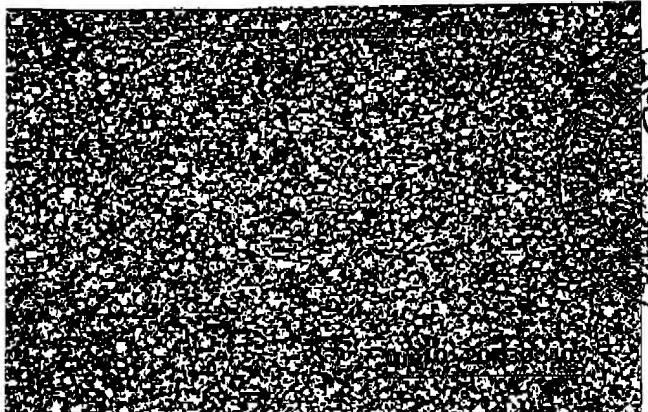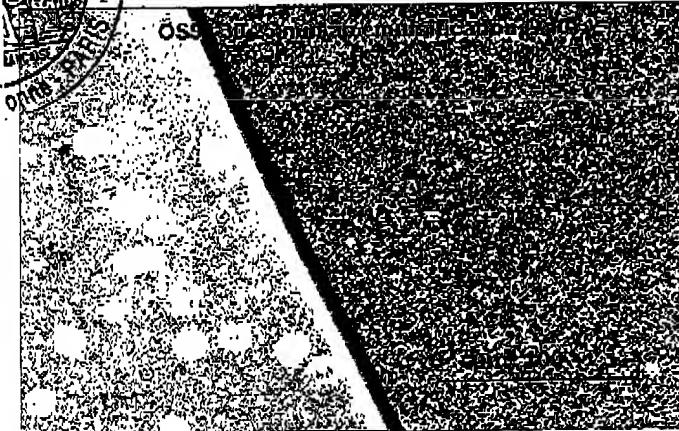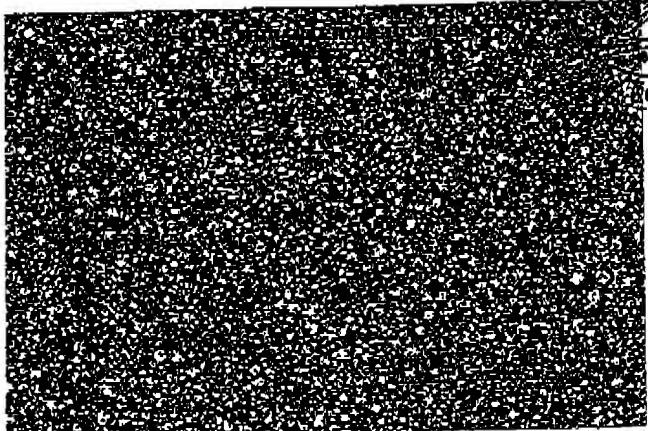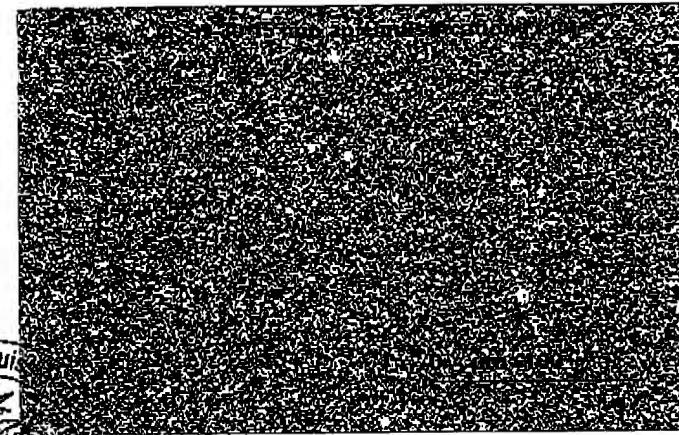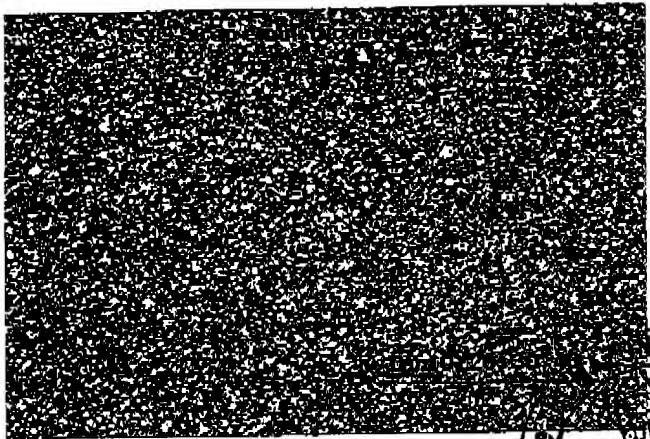

10599-31

monty 3000 rpm





x5
70

A - 61272	25	125
53743	7,73	38,65
71378	5,80	29
71148	3,87	19,35
633	91	25
B - 633 B	215	275
27463	25	25
1129	98	4
5113	28,55	392,75

$$\Sigma (23) = 259 \text{ UD}$$

$$\Sigma (75) = 617 \text{ UD}$$

99 g6 bulls

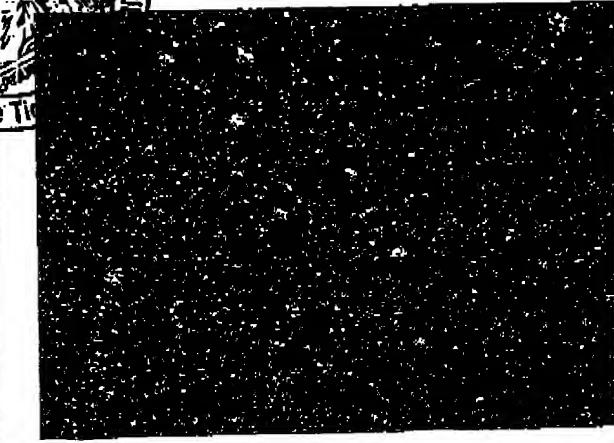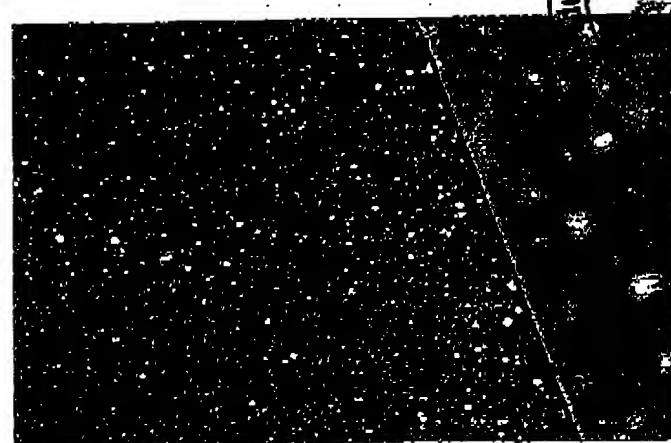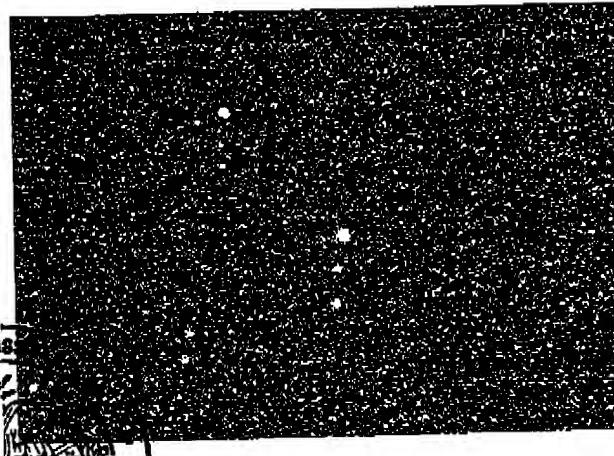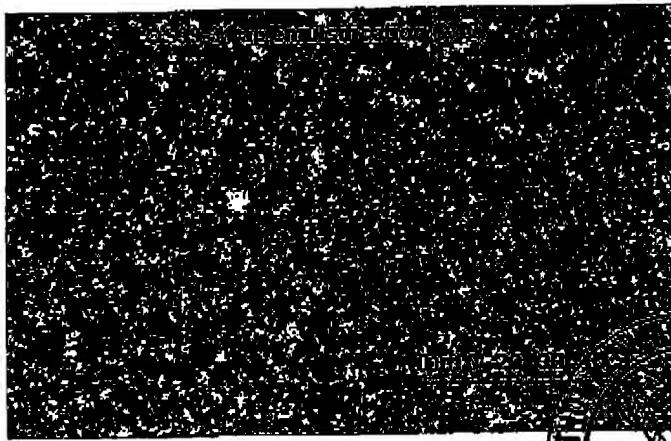

JUN. 17. 2004 12:52PM

4th FLR.

NO. 070 P. 10

60

Console T1M. Lubrizol 621772



80

0599-36

Lubrizol 6215LS 1,85%
x 1,5
~~20~~


A.	6215LS	1,25	1,875
	53743	3,81	5,715
	21378	2,86	4,25
	71148	1,91	2,865
	633	0,1	0,15
	1663	9,07	9,105
B.	633B	0,15	0,225
	2469	35	975
	1129	95	1,35
	53	5	35
	575	83,45	125,125 / 150

Pale 300 rpm à 25°C

Très granulée et fluide

=> augmentation de la vitesse à 500 rpm pour faire d'épaisseur et de la texture n°OK

$$\eta(73) = 3,14$$

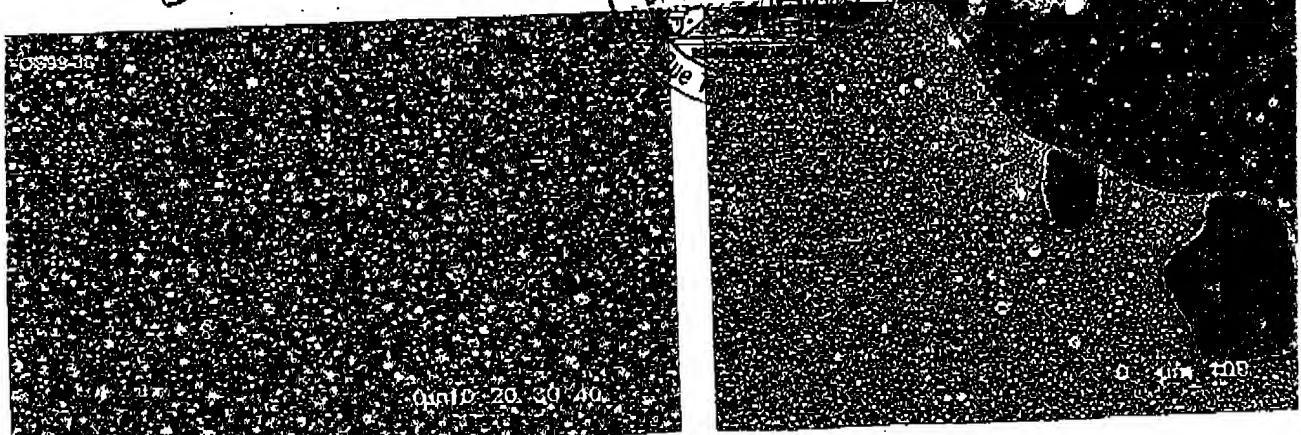



8

Inversion 4

- phase huile = 621565 / 53763 50/50
- phase aqueuse = 30g eau à 1% de MgSO₄

Agita° à la débouleuse à Vmax



Inversion après ajout d'~ 19,11 g de phase

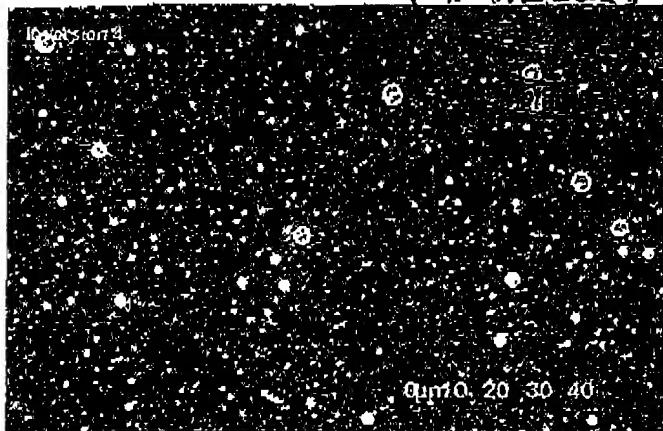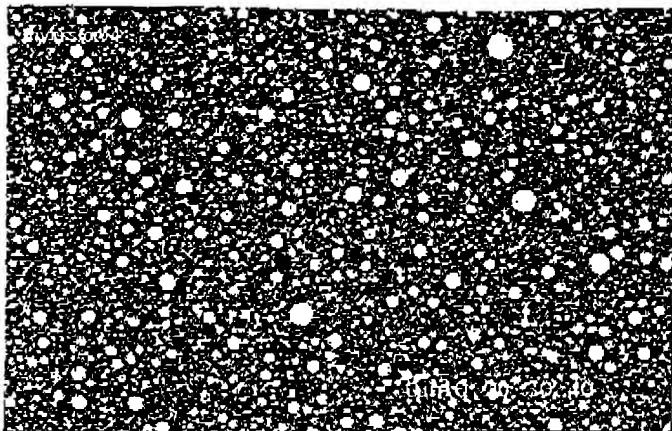**Inversion 5**

- phase huile = 617161 / 53763 25/75
- phase aqueuse = 30g eau à 1% MgSO₄

Agita° à la débouleuse à forte vitesse

Inversion après ajout d'~ 6,08 g de phase huile

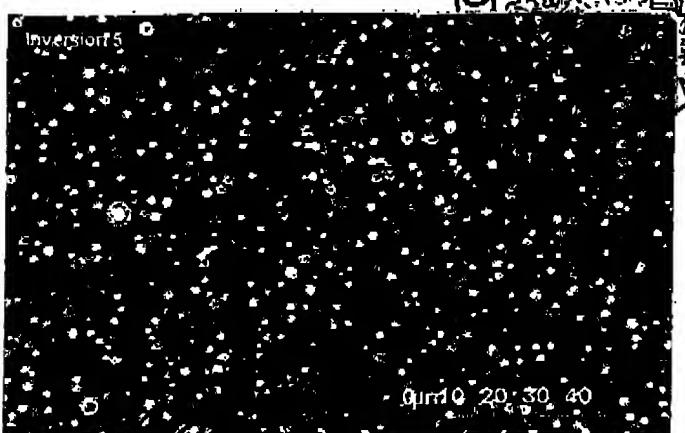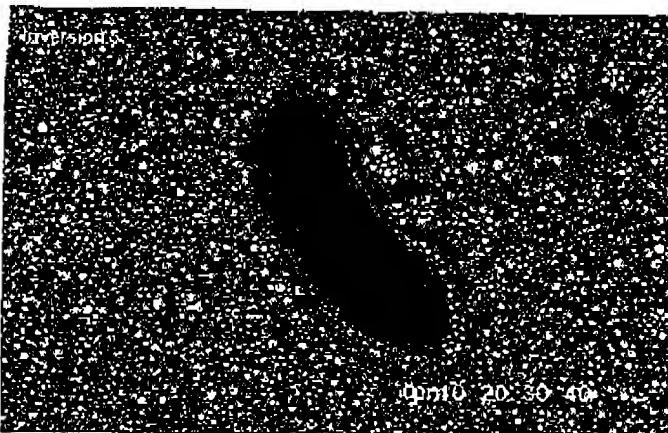

Visé le quatre

